

Networks - Thin film series - Automotive variant


Type: AMA
Sizes: 1206-4 (4 x 0603)

Characteristics:

- Chip resistors in thin film technology
- Four resistors with 2 circuit variants
- Concave contact
- Resistance area coated with surface passivation
- High stability and reliability
- AEC Q200 qualified
- RoHS-conform
- Customer specific barcodes available - also in 2D
- All sizes can be manufactured with the following contact variants
 ⇒ Electroplated alloy resistant tinned

Dimensions (in mm):

L Length	W Width	H Depth	t Contact back	WT Contact width	P Contact spacing	D Contact radius
3,2 ± 0,10	1,6 ± 0,10	0,6 ± 0,10	0,3 ± 0,10	0,5 ± 0,10	0,8	0,3

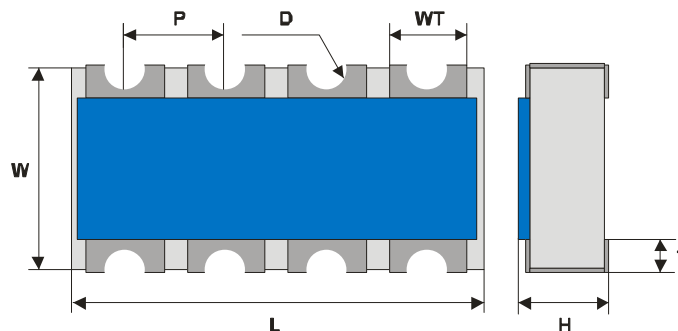

Packaging units:

Reel Ø	Card tape acc. EN 60286-3
180 mm	5 T pcs.
330 mm	10 T pcs. 20 T pcs.
Samples possible up to 50 pcs./value	

Ordering information:

Circuit type 1								
AMA	-N	1206-4	4k7	1%	50ppm/K	N	P	10 (optional)
Type	Contact	Size	R-Value R1;R2;R3;R4	± Tolerance	± TCR	Marking	Packaging	pcs. / Reel (T pcs.)
AMA	-Standard (without add.)	1206-4	100R to 25k	0,25 0,5 1	25 50	N- only without	P- Card tape S- Bulk	5 10 20

Networks - Thin film series - Automotive variant

Type: **AMA**
Sizes: **1206-4 (4 x 0603)**

Ordering information:


Circuit type 2									
AMA	-N	1206-4	4k7	6k8	1%	50ppm/K	N	P	10 (optional)
Type	Contact	Size	R-Value R1;R4	R-Value R2;R3	± Tolerance	± TCR	Marking	Packaging	pcs./Reel (T pcs.)
AMA	-Standard (without add.)	1206-4	100R to 25k	100R to 25k	0,25 0,5 1	25 50	N- only without	P- Card tape S- Bulk	5 10 20

Technical data – depending on size:

Size	Nominal voltage U _{max} (V)	Load P ₇₀ (W)	R-Range	Absolute R-Tolerance (± %)	Matching R-Tolerance (± %)	Absolute TCR (± ppm/K)	Tracking TCR (± ppm/K)	Packaging		
								P	B	S
1206-4	50	4 x 0,063	100R – 25k	± 0.25	0,1	± 25	25	x		x
1206-4	50	4 x 0,063	100R – 25k	± 0.5	0,25	± 25	25	x		x
1206-4	50	4 x 0,063	100R – 25k	± 0.25	0,1	± 50	50	x		x
1206-4	50	4 x 0,063	100R – 25k	± 0.5	0,5	± 50	50	x		x

Circuit type:

Type	AMA 1206-4
1	R1=R2=R3=R4
2	R1=R4 ; R2=R3
Ratio R _{min} /R _{max} on request	



Technical data - general:

Technical data	
Operating temperature range	-55°C ... +155°C
Climatic category acc. EN 60068	55 / 155 / 56
Solderability acc. EN 60068-2-58	245°C 3s
Soldering heat resistance acc. EN 60068-2-58	±(0,1% + 0,05R) at 260°C 10s
Long time stability	
Storage 155°C / 1000h	± (0,5% + 0,05R)
Endurance P ₇₀ / 70°C / 1000h	± (0,25% + 0,05R)
Damp heat, steady state (56d / 40°C / 96%)	± (0,25% + 0,05R)
Biased humidity (1000h / 85°C / 85%)	± (1% +0,05R)

Data, unless specified, acc. EN 140401-801.